


Datei:FT-202-Ad-Slick-Back.jpg

- [Datei](#)
- [Dateiversionen](#)
- [Dateiverwendung](#)
- [Metadaten](#)

YAESU FT-202R

2 METER HAND-HELD FM TRANSCEIVER
"THE HANDIE"

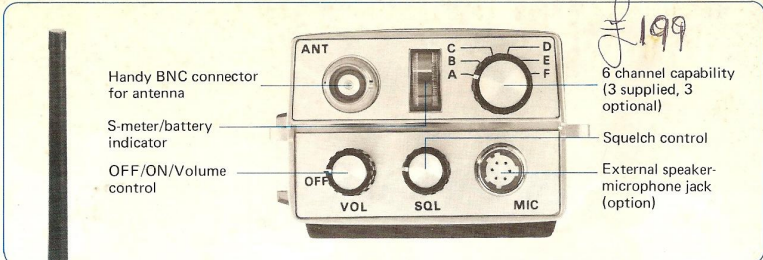

Handy BNC connector for antenna

S-meter/battery indicator

OFF/ON/Volume control

ANT

C B A

DEF

6 channel capability (3 supplied, 3 optional)

Squelch control

External speaker-microphone jack (option)

VOL

SQL

MIC

YAESU engineering brings you these top quality features:

- 1 watt output minimum.
- 6 channel capability (3 supplied, 3 optional).
- Flexible helical whip antenna.
- Equipped with tone burst or subaudible tone squelch.
- Compact size and light weight (less than 1 pound w/o batteries).
- S-meter and battery condition indicator.
- Operates on NiCd or dry cell batteries (not supplied).
- Crisp, clear audio on transmit and receive.
- Built-in speaker and condenser microphone.
- Optional remote speaker-microphone.
- Impact-resistant ABS plastic body.
- Convenient carrying case.

A top performance package you can hold in your hand. . .yours today from YAESU.

■ **SPECIFICATIONS**

GENERAL
Frequency coverage: 144-148 MHz or 144-148 MHz.
Number of channels: 6 (3 provided, 3 optional).
Emission type: F3
Batteries (not supplied): AA size, NiCd (8 needed) or dry cells (7 needed).
Voltage requirement: 9.6 VDC ±10%, maximum 12 VDC.
Current consumption: RX 200 mA (30 mA squelched) TX 500 mA

Case dimensions: 67 x 49 x 171 mm.
Weight (less batteries): 400 g.

TRANSMITTER
Power output: 1 watt.
Deviation: ±5 kHz.
Spurious radiation: 60 dB down or better.
Microphone: Condenser type, 2000 ohm impedance.

RECEIVER
Circuit type: Double conversion superheterodyne.
Intermediate frequencies: 1st IF = 10.7 MHz 2nd IF = 455 kHz
Sensitivity: 0.32 μV for 20 dB quieting.
Selectivity: ±20 kHz at 60 dB down.
Audio output: 500 mW @ 10% THD.



YAESU MUSEN CO., LTD.
C. P. O. BOX 1500
TOKYO, JAPAN
Fox Tango International [Http://www.foxtango.org](http://www.foxtango.org)

YAESU MUSEN U. S. A., INC.
P. O. BOX 498
PARAMOUNT, CALIFORNIA 90723, U. S. A.
Printed in Japan

Größe dieser Vorschau: 422 × 599 Pixel. Weitere Auflösungen: 169 × 240 Pixel | 1.416 × 2.009 Pixel.

Originaldatei (1.416 × 2.009 Pixel, Dateigröße: 439 KB, MIME-Typ: image/jpeg)

Dateiversionen

Klicken Sie auf einen Zeitpunkt, um diese Version zu laden.

	Version vom	Vorschaubild	Maße	Benutzer	Kommentar
aktuell	13:16, 17. Jul. 2012		1.416 × 2.009 (439 KB)	Benutzer (Diskussion Beiträge)	

Sie können diese Datei nicht überschreiben.

Dateiverwendung

Die folgende Seite verwendet diese Datei:

- [Geschichte UKW Funk](#)

Metadaten

Diese Datei enthält weitere Informationen, die in der Regel von der Digitalkamera oder dem verwendeten Scanner stammen. Durch nachträgliche Bearbeitung der Originaldatei können einige Details verändert worden sein.

Hersteller	HP
Modell	HP psc1600
Erfassungszeitpunkt	23:09, 29. Aug. 2006
Horizontale Auflösung	200 dpi
Vertikale Auflösung	200 dpi
Y und C Positionierung	Benachbaart
Sättigung	Normal
Schärfe	Normal
Exif-Version	2.2
Farbraum	sRGB